


MOOVI SERIES

ELECTROMECHANICAL OPERATOR FOR ROAD BARRIERS



Opens the future



• A MODEL FOR EVERY NEED.

- Available in several versions, for openings from 3 to 5 m and speeds from 1.5 to 8 s.
- Supplied with a wide range of accessories.

• SMART TECHNOLOGY.

- Internal ventilation system.
- Fast release with personalised key.
- Predrilled frame to allow simpler installation of the accessories.

CODE	DESCRIPTION	VOLTAGE	BOOM LENGTH
P940026 00002	MOOVI 30	230 V	3 m
P940028 00002	MOOVI 50	230 V	5 m
P940030 00002	MOOVI 30S	230 V	3 m
P940027 00002	MOOVI 30 RMM	230 V	3 m
P940029 00002	MOOVI 50 RMM	230 V	5 m

TECHNICAL FEATURES

	MOOVI 30	MOOVI 50	MOOVI 30S	MOOVI 30/50 RMM
CONTROL PANEL	ALPHA BOM (incorporated)	ALPHA BOM (incorporated)	LEO MV D (incorporated)	LEO MV D (incorporated)
REVERSIBLE/IRREVERSIBLE OPERATOR	irreversible	irreversible	irreversible	irreversible
POWER SUPPLY	230 V- ± 10%, 50 Hz single-phase	230 V- ± 10%, 50 Hz single-phase	230 V- ± 10%, 50 Hz single-phase	230 V- ± 10%, 50 Hz single-phase
ABSORBED POWER	300 W	300 W	300 W	300 W
THERMAL PROTECTION	integrated	integrated	integrated	integrated
OPENING OR CLOSING TIME	4 s	8 s	1,5 s + slowdown	4 s (MOOVI 30), 8 s (MOOVI 50)
SLOWDOWN	-	-	adjustment	-
IMPACT REACTION	-	-	integrated torque limiter	integrated torque limiter
TYPE OF LOCK	mechanical opening/closing	mechanical opening/closing	mechanical opening/closing	mechanical opening/closing
TYPE OF LIMIT SWITCHES	electric, incorporated, adjustable	electric, incorporated, adjustable	electric, incorporated, adjustable	electric, incorporated, adjustable
MANUAL RELEASE	fast release with personalised key	fast release with personalised key	fast release with personalised key	fast release with personalised key
OPERATING CYCLE	very intensive use	very intensive use	very intensive use	very intensive use
ENVIRONMENTAL CONDITIONS	from -10°C to +55°C	from -10°C to +55°C	from -10°C to +55°C	from -10°C to +55°C
DEGREE OF PROTECTION	IP24	IP24	IP24	IP24
OPERATOR WEIGHT WITHOUT THE ROD	360 N (~36 kg)	360 N (~36 kg)	360 N (~36 kg)	360 N (~36 kg)
DIMENSIONS	see drawing	see drawing	see drawing	see drawing


Boom ELL3 o ELL5	boom	boom	boom	boom	boom	boom	boom	boom	boom	boom	boom	boom	boom	boom	boom	boom	boom	boom	boom	boom	boom	
SB	+	+	+																			
PCA (only above the boom)	+	+		+	+		+	+														
PCA (under and above the boom)										+	+										+	+
KIT LIGHT and KIT LIGHT 1	+			+			+			+				+							+	+
MOOVI GA or MOOVI GAMA	+	GA	+	GA	+	GA	+	GA	+	GA	+	GA	+	GA	+	GA	+	GA	+	GA	+	GA
Passageway MOOVI 30 (m)	1,9	1,9	2,0	2,3	2,3	2,4	2,7	2,7	2,5	2,6	2,9	2,2	2,2	2,3	2,6	2,7	2,8	3,0	3,0	2,9	3,0	3,0
Passageway MOOVI 50 (m)	3,3	3,3	3,5	3,9	4,0	4,2	4,6	4,8	4,4	4,5	5,0	3,6	3,6	3,7	4,3	4,4	4,6	5,0	5,0	4,8	5,0	5,0

Calculating the maximum boom length of MOOVI30 and MOOVI50 road barriers based on the accessories installed.


Example MOOVI 30: boom + SB + PCA + LIGHT + GA = boom Max. ELL3 1,9m

Example MOOVI 50: boom + SB + PCA + LIGHT + GA = boom Max. ELL5 3,3m

RESIDENTIAL, APARTMENT-BLOCK AND INDUSTRIAL USE


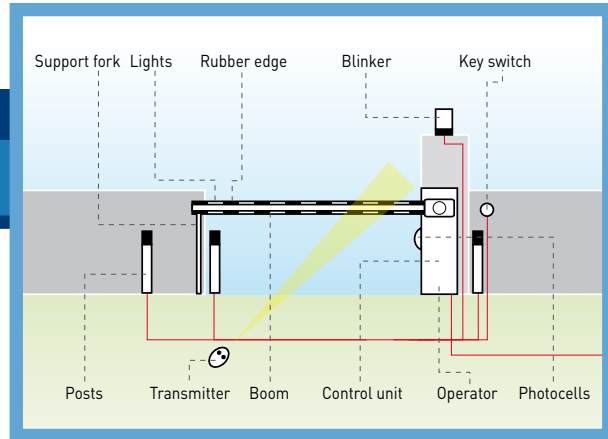


DIMENSIONS

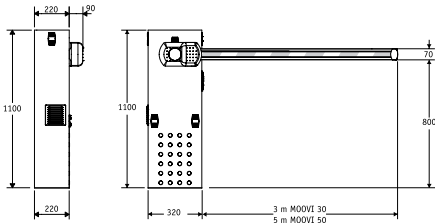

WHEN ORDERING INDICATE THE WORKING PASSAGEWAY

ARTICULATED BOOM

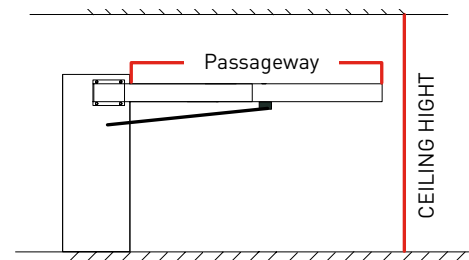

ACCESSORIES



P111376 - SCS 1

Serial connection board for QSC D MA, LIBRA C MA, LIBRA C MV, LIBRA C LX, VENERE D, LEO D MA, LEO MV, RIGEL 5 and ALTAIR P.

NEW 2008



P111408 - SCS WIE

Circuit board for direct connection of wiegand accessories (such as SELETTO, COMPAS SLIM, etc) to the control units QSC D MA, LIBRA C MA, LIBRA C MV, LIBRA C LX, VENERE D, LEO D MA, LEO MV, RIGEL 5 and ALTAIR P.



N728020 - ELL 3

One-piece 3 m boom.



N728021 - ELL 5

One-piece 5 m boom.



P120002 - KIT MOOVI 130

External photocell post kit



N728029 - MOOVI ART90

90-degree articulated boom for MOOVI 130, 50, 30S. Max opening 3,8m.



D940008 - MOOVI GA

Movable boom rest rod




D940009 - MOOVI GAMA

Movable boom rest rod, shock absorbing.



P120004 - KIT MOOVI PRM

Kit to protect hands from shearing.



P120001 00001 - KIT MOOVI LIGHT

Lighting kit for 3 or 4.5 m booms. To be used in combination with the MOOVI PCA kit




P120001 00002 - KIT MOOVI LIGHT1

Lighting kit for 5 or 6 m booms. To be used in combination with the MOOVI PCA kit



P120003 00001 - PCA 3

Boom upper and lower casing profile in rubber for ELL3.



P120003 00002 - PCA 6

Boom upper and lower casing profile in rubber for ELL5, ELL6.



D730251 - CBO

MOOVI mod. anchor base.



D573003 - SB

Fence previously mounted on boom. Cannot be applied to BGV/MOOVI 30 models. Its application in the other models gives rise to a reduction of the overall length of the boom (see table).



D730088 - FAF

Fixed bar rest fork.

NEW 2008



N190104 - BIR C

Rubber safety edge.

For system composition and installation refer to the regulations in force in the country where the system is being installed. The indicated data are not binding. BFT reserves the right to make modifications without prior notice.